

200

CARATTERISTICHE

- **Corpo** in alluminio di lega speciale.
- **Forza** di chiusura variabile **EN 2-4** per porte da 750 a 1100 mm. di larghezza.
- Due valvole antisfilamento per controllo indipendente della velocità di chiusura, scatto finale e/o chiusura ammortizzata.
- **Universale** per montaggio normale lato cerniera o rovesciato lato opposto cerniera.
- **Apertura** a 180° con montaggio normale.
- **Finiture:** Argento e nero.


FEATURES:

- **Body** in special alloy aluminium .
- **Variable** closing force sizes **EN 2-4** for doors 750 -1100 mm. wide
- **Two valves** for independent hydraulic control of closing speed and of final latch or final damping.
- **Universal** for regular mounting (pull side) or reversed mounting (push side).
- **Opening** to 180° for regular mounting.
- **Finishes:** silver, black.

MAB MAKES DOOR CLOSING EASY

DIMENSIONI

DIMENSIONS

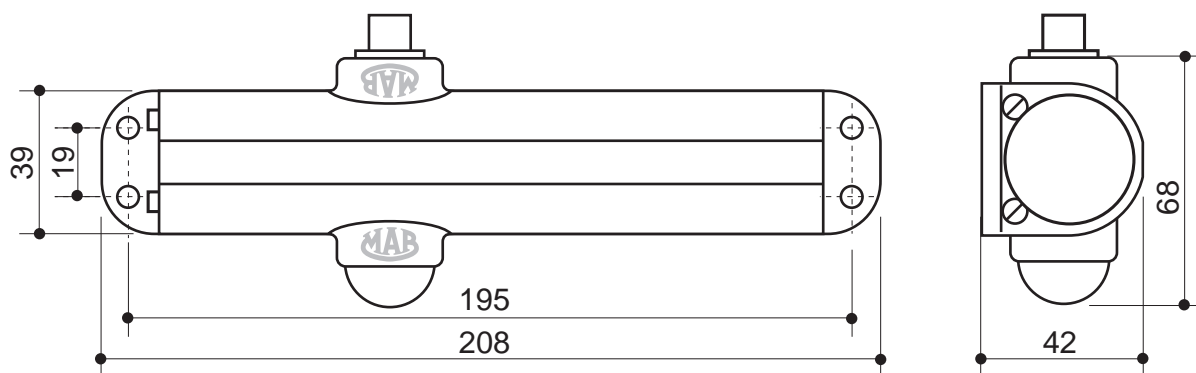


ACCESSORI

ACCESSORIES

AC 348

Braccio standard


Regular arm

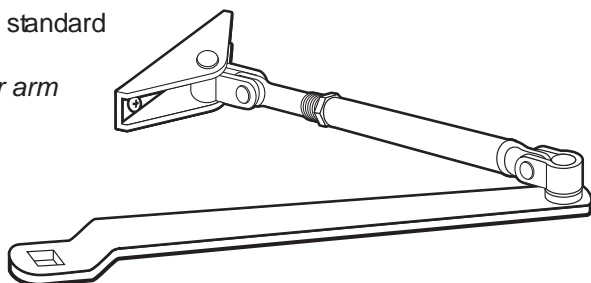

AC 349


Braccio con
fermo regolabile

*Adjustable
Hold Open arm*

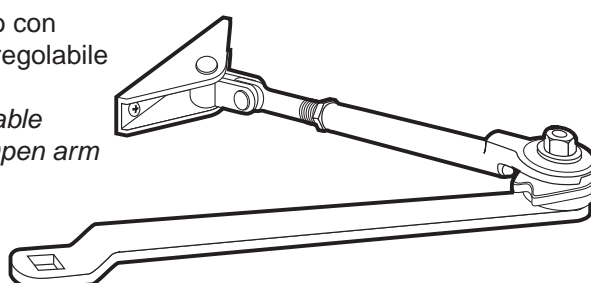

AC 358

Braccio a slitta con dispositivo di fermo amovibile
Sliding arm and rail with removable Hold Open device

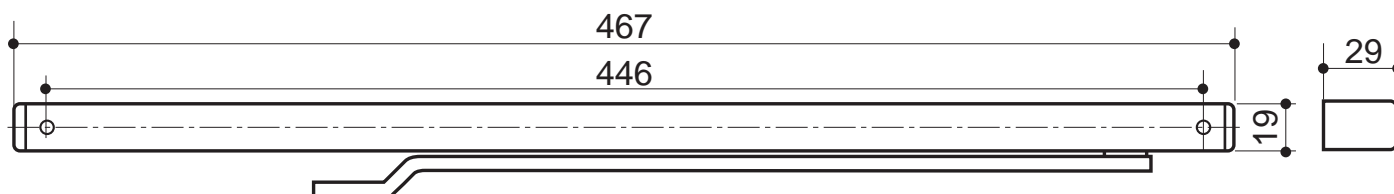

MONTAGGI

MOUNTINGS

